



# MAKING A GLOBAL IMPACT

CLAYDON BUSINESS PARK, GIPPING ROAD, GREAT BLAKENHAM, IPSWICH, SUFFOLK IP6 0NL ENGLAND  
 TELEPHONE: +44 (0) 1473 830431 EMAIL: SALES@BSPIF.CO.UK WWW.BSP-IF.CO.UK

## CX HYDRAULIC HAMMER



CX110, MOUNTED ON PILING RIG



CX85, CRANE SUSPENDED AND FITTED WITH LEGS AND INSERTS FOR DRIVING SHEET PILES



CX110, CRANE SUSPENDED AND FITTED WITH TUBE GUIDE

The CX range of piling hammers is designed for driving a wide variety of bearing and sheet piles. Available with legs and inserts or pile sleeves for use freely suspended, or with back guides for operating from a piling mast, the CX range has the following important features:

- Total control of hammer stroke and blow rate
- Allows precise matching of energy to suit the pile driving requirements
- Highly efficient hydraulic system gives low energy loss and low running cost
- Simple, fast dolley changing
- Cylinder and dropweight connection with shock absorber, easily accessible
- Cage and dropweight design gives short overall hammer length
- Available with BSP Hydropacks for optimum hammer performance
- Can be operated directly from hydraulic crane or excavator base
- Suitable for driving Raked (Batter) Piles

### PILE TYPES

#### TYPICAL PILES DRIVEN SINGLY OR IN PAIRS (IF GROUND CONDITIONS ALLOW):

Arcelor AZ12 to AZ50, AZ36-700 to 40-700  
 All Arcelor AU sections. Also, LX / PU / W ranges, USA PZ range, Hoesch H series, 'H' Piles, HP200 to HP400 USA HP10" to HP16"  
 Tubes and Concrete bearing piles up to 1220mm OD plus many others...

PERFORMANCE DATA	RAM MASS	MAX. IMPACT ENERGY	BLOW RATE @ RATED ENERGY	OPERATING PRESSURE	HYDRAULIC FLOW REQUIRED
MODEL	Kg	kNm	bpm	Bar	L/min
CX50	4000	51	46	200	180
CX60	5000	60	44	241	215
CX85	7000	83	40	260	215
CX110	9000	106	34	250	215
CXL140	11000	140	30	280	250

The above weights and dimensions are given as a typical guide and are nominal. Designs can vary to suit customer specific applications and pile type. Contact BSP IF for greater detail.

# CX TECHNICAL DATA

All CX hammers are available in the following three standard hammer configurations:  
Other options available upon request. (Dimensions are mm).

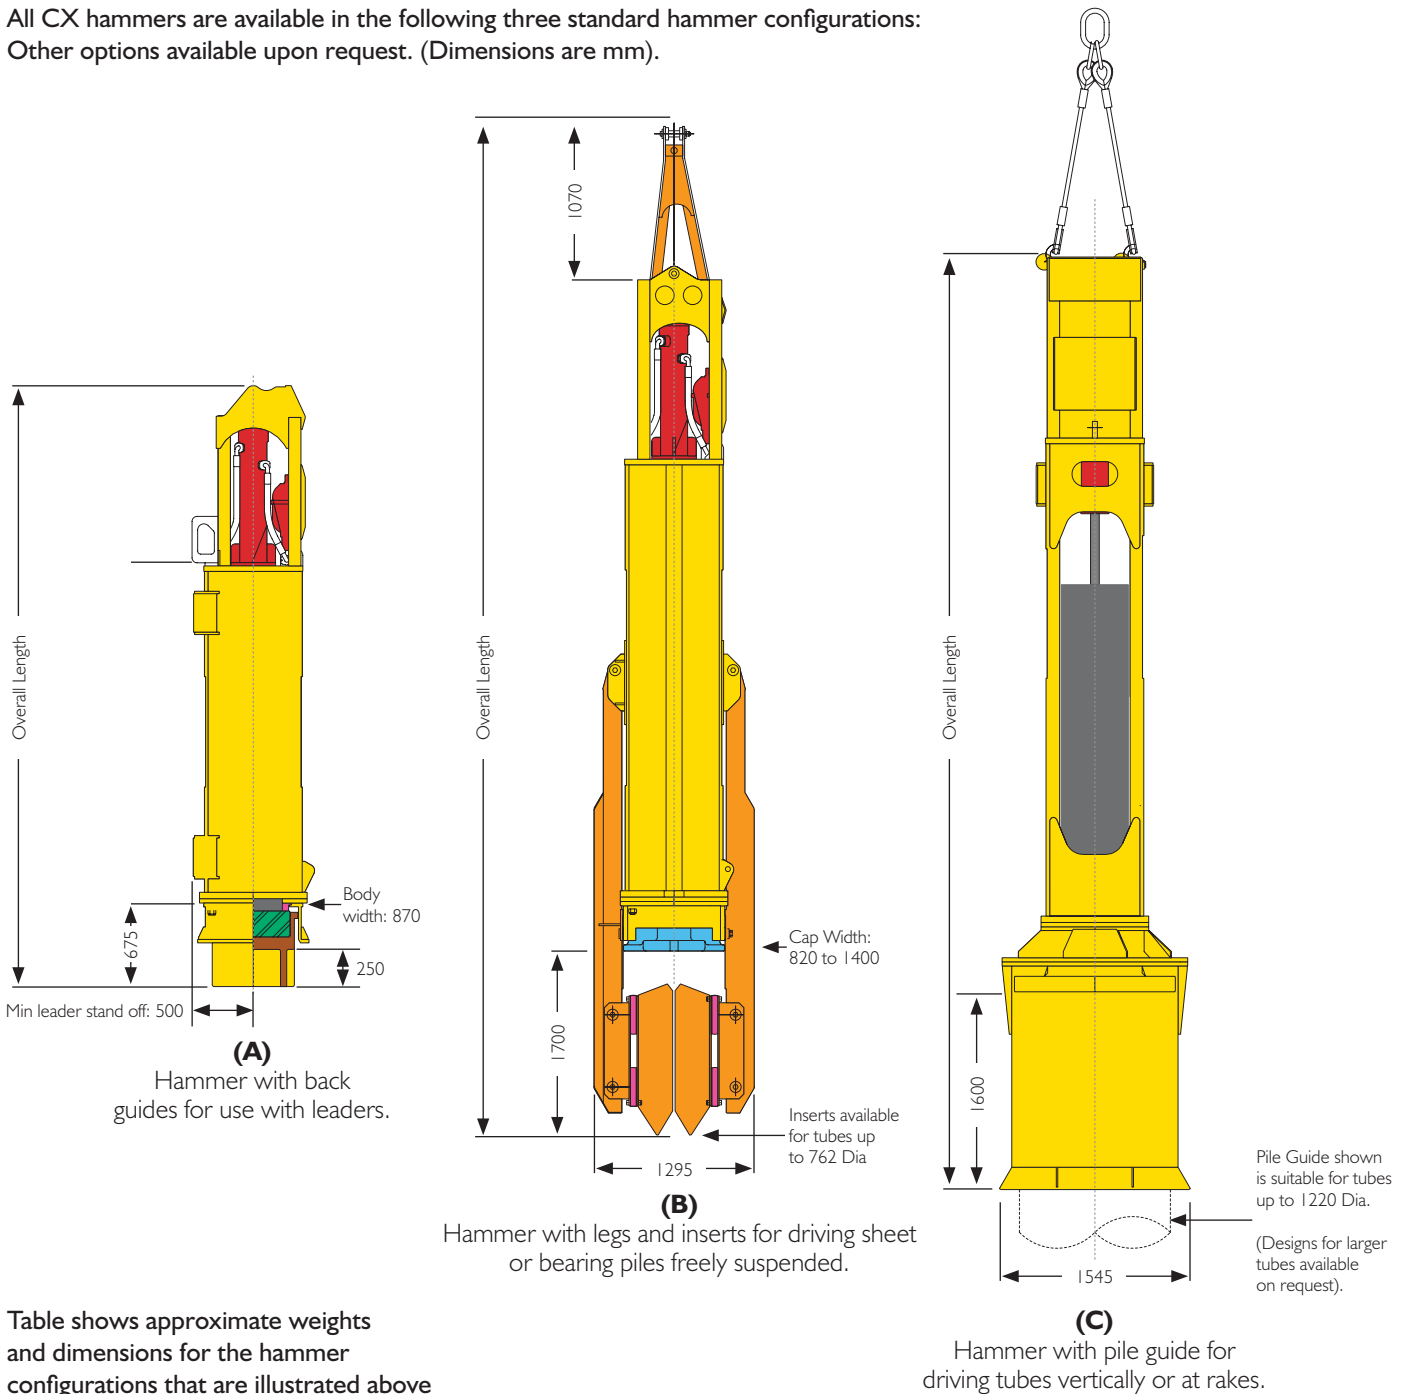


Table shows approximate weights and dimensions for the hammer configurations that are illustrated above (weight includes typical drive cap or helmet)

TYPICAL DIMENSIONS	(A) HAMMER WITH BACK GUIDES FOR LEADER OPERATION		(B) HAMMER WITH LEGS & INSERTS FREELY SUSPENDED		(C) HAMMER WITH Ø 1.22M PILE GUIDE FREELY SUSPENDED	
MODEL	OVERALL LENGTH (mm)	WEIGHT (Kg)	OVERALL LENGTH (mm)	WEIGHT (Kg)	OVERALL LENGTH (mm)	WEIGHT (Kg)
CX50	5020	7799	7325	9150	CONTACT BSP	CONTACT BSP
CX60	5863	9159	8170	10500	CONTACT BSP	CONTACT BSP
CX85	5863	11452	8170	12500	8400	14276
CX110	6380	14107	8680	15100	8910	16524
CXLI40	7750	17000	8750	17900	8950	19000

The above weights and dimensions are given as a typical guide and are nominal. Designs can vary to suit customer specific applications and pile type. Contact BSP IF for greater detail.